

**MASCARILLA AUTOFILTRANTE FFP3 NR  
PRODUCTO EPI (NO MÉDICO)  
(NO REUTILIZABLE)  
Modelo LT2020-AP3**



## Envasado y embalaje

Una caja contiene 20 mascarillas y mide 14 x 12 x 14,5 cm.



La caja maestra contiene 400 mascarillas y mide 62 x 30 x 30 cm.

Dentro lleva 20 cajas de 20 mascarillas cada una.

Su peso bruto es 5 Kg. Su peso neto es 4,5 Kg.



## Instrucciones de uso

# INSTRUCCIONES DE USO

Las instrucciones de uso deben leerse y seguirse

1. No seguir todas las instrucciones y limitaciones sobre el uso de esta mascarilla y/o no usar esta mascarilla durante todo el tiempo de exposición puede reducir la efectividad de la mascarilla y como resultado puede ser causa de enfermedad o muerte.
2. Antes de su uso, el empleador debe capacitar al usuario para el uso adecuado de la mascarilla de acuerdo con las normas de seguridad y salud aplicables. Los dispositivos de protección respiratoria deben seleccionarse según el tipo y la concentración de las sustancias peligrosas.
3. No lo utilice para protección contra gases, vapores por encima de los valores OEL o en una atmósfera que contenga menos del 17% de oxígeno.
4. El uso de esta mascarilla no está permitido en los contenedores no ventilados, minas o canales y tampoco deben permitirse usar en atmósferas explosivas.
5. Si la mascarilla está dañada o si el usuario tiene dificultad al respirar, éste debe abandonar el área contaminada, desechar y reemplazar la mascarilla. También debe abandonar el área contaminada inmediatamente si se presentan mareos u otras molestias.
6. Nunca altere ni modifique la mascarilla.
7. No la use con barba u otro vello facial que evite el contacto directo entre la cara y el borde de la mascarilla.
8. No use la mascarilla cuando la concentración de contaminantes suponga un peligro inmediato para la vida y la salud, o se desconozca, o cuando la concentración de partículas supere el nivel máximo de uso u otros niveles determinados por las Autoridades nacionales de seguridad y salud ocupacional.
9. La mascarilla sólo se puede utilizar si se conocen el tipo y la concentración de las sustancias nocivas. En caso de sustancia o concentración desconocidas o condiciones variables, se debe utilizar un aparato de respiración.
10. Se debe prestar especial atención a las normas relativas al uso de aparatos de protección respiratoria (BGR 190 / ZH1 / 701) y los principios de seguridad industrial para las pruebas de precaución de medicina ocupacional G26 o la Norma Nacional de Seguridad y Salud Ocupacional aplicable.
11. El uso de la mascarilla se limita a un turno de trabajo. Lo que significa que la mascarilla está diseñada sólo para la duración del turno y debe sustituirse después del mismo.

### VIDA ÚTIL:

La mascarilla se obstruye con partículas de polvo por un aumento de la resistencia respiratoria. La mascarilla está destinada a ser utilizada por una sola persona. La duración del uso debe ser máximo en un solo turno.

### INSTRUCCIONES DE ALMACENAMIENTO:

La mascarilla hasta su uso debe estar dentro del paquete individual sellado para conservar sus propiedades. Para el transporte, estos paquetes individuales deberán embalarse adecuadamente en cajas exteriores para protegerlos de los peligros climáticos y los golpes mecánicos.

### CADUCIDAD DEL PRODUCTO:

24 meses a partir de la fecha de fabricación (si se almacena entre -5°C - + 50°C y la humedad no sea superior al 80%)

### CONDICIONES DE TRANSPORTE:

Al transportar este producto, utilice el embalaje original proporcionado.

### INFORMACIÓN DEL PRODUCTO

Nombre del Producto: Mascarilla Autofiltrante FFP3 NR, producto EPI (no médico) Modelo: LT2020-AP3 Tipo: FFP3 NR  
Norma: EN 149:2001+A1:2009 Regulación: Reglamento UE 2016/425 relativo a los equipos de protección individual



2022/09

Fecha de  
caducidad



<80%

Máxima humedad  
relativa para el  
almacenaje




-5°C - +50°C  
Rango de  
temperatura  
para el  
almacenaje



Ver la información  
proporcionada por el  
fabricante

## INSTRUCCIONES DE COLOCACIÓN:

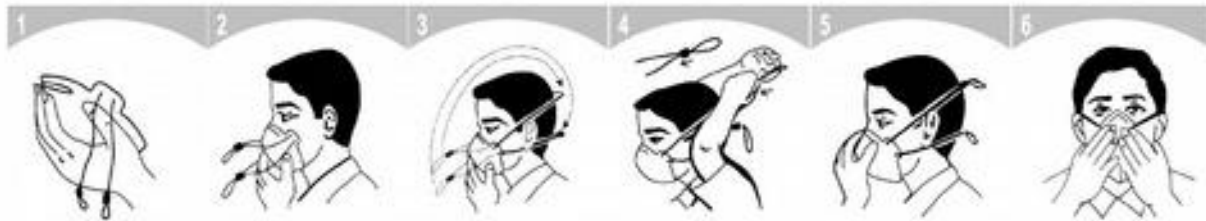

INSTRUCCIONES DE COLOCACIÓN QUE SE DEBEN SEGUIR CADA VEZ QUE SE UTILICE LA MASCARILLA  
**Antes de su uso, compruebe si hay daños visibles. No se debe utilizar la mascarilla si hay daños visibles o partículas dañadas o si el interior de la mascarilla está sucio.**

1. Coloque la mascarilla en su mano.
2. Con la pinza para la nariz hacia arriba, cubra la boca y la nariz con la mascarilla.
3. Coloque las cintas elásticas en la parte posterior de la cabeza y el cuello.
4. Mueva el botón Ajustable para ajustar las cintas de la cabeza y el cuello según sea necesario.
5. Presione el clip nasal ajustable para evitar fugas.
6. Para verificar el ajuste, coloque ambas manos completamente sobre la mascarilla y exhale. Si hay fugas de aire alrededor de la nariz, reajuste el clip nasal. Si hay fugas de aire en los bordes de la mascarilla, mueva las cintas hacia atrás a lo largo de los lados de su cabeza. Repita el procedimiento hasta que la mascarilla esté sellada correctamente.

Si no puede lograr un ajuste adecuado, **NO ENTRE** en el área contaminada. Consulte a su supervisor.


### Descripción del producto

Nombre del producto	Mascarilla auto filtrante (EPI)
Dimensión (largo por ancho)	15,5 cm.*12cm. (± 5%)
Modelo	LT2020-AP3
Categoría	<b>FFP3</b>
Con o sin válvula	<b>Sin válvula</b>
Un sólo uso (NR) o no (R)	<b>NR</b> (no reutilizable)
Rendimiento de obstrucción declarado o no	<b>No</b>
Materiales principal	Tela no tejida, tejido <i>melt-blown</i>
Uso previsto	Este producto está destinado a proteger al usuario contra los efectos nocivos de la contaminación del aire en forma de partículas sólidas y / o líquidas que forman aerosoles (polvo, humo y niebla)



## Modelo y estructura del producto

### – Estructura del producto:

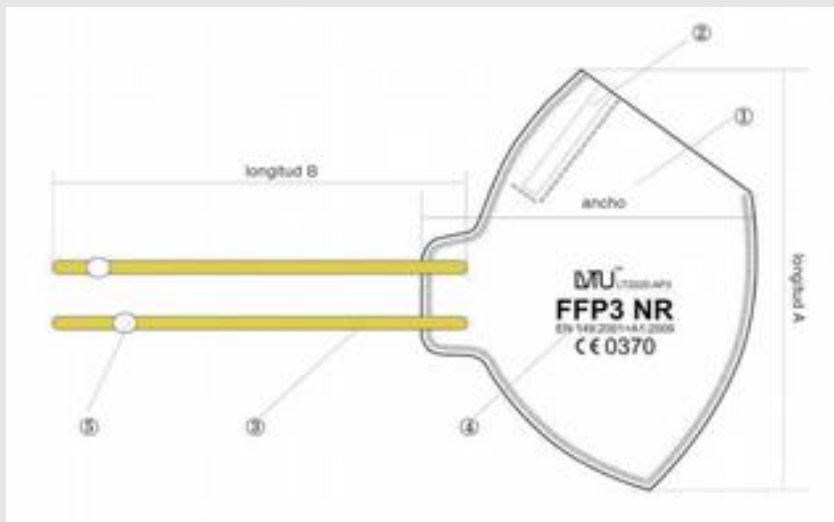


1. Cuerpo de la mascarilla
2. Clip nasal
3. Banda para la cabeza
4. Calificación
5. Botón ajustable

Longitud A: 15,5 cm.  $\pm$  5%

Longitud B: 15 cm.  $\pm$  5%

Ancho: 12 cm.  $\pm$  5%

### – Estructura del cuerpo de la mascarilla:

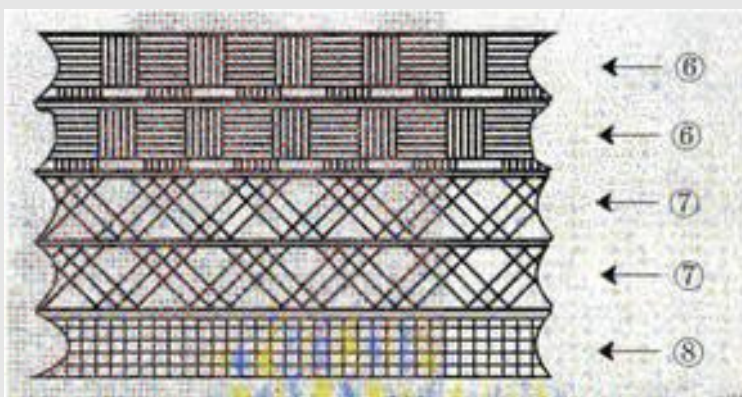

6. Capas de bloque:

Tejido no tejido 50g /m<sup>2</sup> por capa

7. Filtros:

Tejido *melt-blown* 40g /m<sup>2</sup> por capa

8. Cubierta interior:

Tejido no tejido 25g /m<sup>2</sup>

## Materiales del producto (materiales y especificaciones)

Componentes	Materiales	Especificación: Largo x Ancho
Clip nasal	PE blanco, alambre de hierro recubierto de plata	9 cm.( $\pm$ 5%) x 0,5 cm. ( $\pm$ 5%)
Banda para la cabeza	Nylon, spandex	30 cm.( $\pm$ 5%) x 0,7 cm. ( $\pm$ 5%)
Cuerpo de la mascarilla	Tejido no tejido, tejido <i>melt-blown</i>	15,5 cm.( $\pm$ 5%) x 12 cm. ( $\pm$ 5%)
Botón ajustable	TPE blanco	1 cm.( $\pm$ 5%) x 0,5 cm. ( $\pm$ 5%)

Fotos del producto







# CERTIFICADO DE EXAMEN TIPO CE

LGAI Technological Center, S.A. (APPLUS)  
 Campus UAB- Ronda de la Font del Carme s/n  
 08193 Bellaterra (Barcelona)  
 T +34 93 567 20 00  
 www.applus.com



## CERTIFICADO DE EXAMEN DE TIPO EU TYPE EXAMINATION CERTIFICATE



No. 0370-4243-PPE/B

<b>ORGANISMO NOTIFICADO N?</b> <i>NOTIFIED BODY NUMBER</i>	<b>0370 - LGAI TECHNOLOGICAL CENTER (APPLUS)</b>
<b>SOLICITANTE</b> <i>APPLICANT</i>	<b>Ningbo Lvtu Safety Technology Co., Ltd.</b> No.6,Zhong xing Road,Yuyao Economic Development Zone,Zhejiang Province 315403,CHINA
<b>FABRICANTE</b> <i>MANUFACTURER</i>	<b>Ningbo Lvtu Safety Technology Co., Ltd.</b> 3 / F, building 9, 300 Yinhai Road, Jiangbei District, Ningbo City,Zhejiang Province 315403,CHINA
<b>REGLAMENTO DE APLICACION PARA DAR LA CONFORMIDAD / APPLICABLE REGULATION TO GIVE CONFORMITY:</b> <b>REGLAMENTO (UE) 2016/425 SOBRE LOS EQUIPOS DE PROTECCION INDIVIDUAL</b> <i>REGULATION (EU) 2016/425 PERSONAL PROTECTIVE EQUIPMENT</i>	
<b>PROCEDIMIENTO DE EVALUACION DE LA CONFORMIDAD</b> <i>CONFORMITY ASSESSMENT PROCEDURE</i>	Módulo // Module: <b>B</b> <b>EXAMEN UE DE TIPO / EU TYPE EXAMINATION</b>
<b>IDENTIFICACION DEL EPI (NUMERO DE TIPO)</b> <i>IDENTIFICATION OF THE PPE (TYPE NUMBER)</i>	Ref.: LT2020-AP3 Particle filtering half mask
<b>NIVEL O NIVELES DE RENDIMIENTO O LA CLASE DE PROTECCION DEL EPI / PERFORMANCE LEVEL OR PROTECTION CLASS OF THE PPE</b>	FFP3 NR
<b>NORMAS ARMONIZADAS / HARMONISED STANDARDS</b>	EN 149:2001 + A1:2009 Dispositivos de protección respiratoria. Medias filtrantes de protección contra partículas. Requisitos, ensayos, marcado. <i>EN 149:2001 + A1:2009 Respiratory protective devices. Filtering half masks to protect against particles. Requirements, testing, marking</i>
<b>FECHA DE EMISION / ISSUE DATE</b>	<b>24/08/2020</b>
<b>VALIDEZ HASTA / VALIDITY UNTIL</b>	<b>24/08/2025</b>
El presente certificado se mantendrá vigente durante 5 años siempre que el producto descrito no sea modificado y cumpla los requisitos esenciales de salud y seguridad establecidos en el Reglamento (UE) 2016/425. Para asegurar dicho cumplimiento, este certificado deberá ir acompañado de la documentación correspondiente a la Evaluación de Conformidad con el tipo según módulo C2, D (realizada por un Organismo Notificado, según frecuencia establecida). <i>This certificate will remain valid for 5 years as long as the indicated product is not modified and fulfils the essential requirements of health and safety established in (EU) Regulation 2016/425. To ensure such compliance, this certificate must be accompanied by the documentation corresponding to the Conformity Assessment to type according to C2, D(carried out by a Notified Body according, to the established frequency).</i>	

  
 LGAI Technological Center, S.A.  
 Xavier Ruiz Peña  
 Managing Director, Product Conformity B.U.



Este documento carece de validez sin su anexo técnico, cuyo número coincide con el del certificado.  
*This document is not valid without its technical annex, whose number coincides with the number of certificate.*

Puede comprobarse la validez de este certificado en nuestra página web / You can check the validity of this certificate into our website at :  
[www.appluslaboratories.com/certified\\_products](http://www.appluslaboratories.com/certified_products)



**ANEXO TÉCNICO**  
*TECHNICAL ANNEX*

0370-4243-PPE/B

**I. MODELOS INCLUIDOS EN EL CERTIFICADO**

*REFERENCES INCLUDED IN THIS CERTIFICATE*

<b>MARCA</b> <i>BRAND</i>	LVTU
<b>IDENTIFICACIÓN DEL EPI (NºMERO DE TIPO)</b> <i>IDENTIFICATION OF THE PPE (TYPE NUMBER)</i>	Ref.: LT2020-AP3 Particle filtering half mask
<b>NIVEL O NIVELES DE RENDIMIENTO O LA CLASE DE PROTECCIÓN DEL EPI</b> <i>PERFORMANCE LEVEL OR PROTECTION CLASS OF THE PPE</i>	FFP3 NR
<b>INFORME DE ENSAYO</b> <i>TEST REPORT</i>	[2020]WSZ FHL NO.7307 issued by Jiangsu Guojian Testing Technology Co.,Ltd.

# CERTIFICADO DE MODULO DE PRODUCCION DE CE

LGAI Technological Center, S.A. (APPLUS)  
 Campus UAB - Ronda de la Font del Carme s/n  
 08193 Bellaterra (Barcelona)  
 T +34 93 567 20 00  
 www.applus.com



## CERTIFICADO DE CONFORMIDAD CON EL TIPO CONFORMITY TO TYPE CERTIFICATE



No. 0370-4465-PPE/C2

<b>ORGANISMO NOTIFICADO Nº</b> <i>NOTIFIED BODY NUMBER</i>	<b>0370 - LGAI TECHNOLOGICAL CENTER (APPLUS)</b>
<b>SOLICITANTE</b> <i>APPLICANT</i>	<b>Ningbo Lvtu Safety Technology Co.,Ltd.</b> No.6,Zhong xing Road,Yuyao Economic Development Zone,Zhejiang Province 315403,CHINA
<b>FABRICANTE</b> <i>MANUFACTURER</i>	<b>Ningbo Lvtu Safety Technology Co.,Ltd.</b> 3 / F, building 9, 300 Yinhai Road, Jiangbei District, Ningbo City,Zhejiang Province 315403,CHINA
<b>REGLAMENTO DE APLICACIÓN PARA DAR LA CONFORMIDAD / APPLICABLE REGULATION TO GIVE CONFORMITY:</b> <b>REGLAMENTO (UE) 2016/425 SOBRE LOS EQUIPOS DE PROTECCIÓN INDIVIDUAL</b> <i>REGULATION (EU) 2016/425 PERSONAL PROTECTIVE EQUIPMENT</i>	
<b>PROCEDIMIENTO DE EVALUACIÓN DE LA CONFORMIDAD CON EL TIPO</b> <i>CONFORMITY ASSESSMENT PROCEDURE TO TYPE</i>	Módulo // Module: <b>C2</b> <b>BASADA EN EL CONTROL INTERNO DE LA PRODUCCIÓN MÁS EL CONTROL SUPERVISADO DE LOS PRODUCTOS A INTERVALOS ALEATORIOS</b> <i>BASED ON INTERNAL PRODUCTION CONTROL PLUS SUPERVISED CONTROL OF PRODUCTS AT ALEATORY INTERVALS</i>
<b>IDENTIFICACIÓN DEL EPI (NÚMERO DE TIPO)</b> <i>IDENTIFICATION OF THE PPE (TYPE NUMBER)</i>	Ref.: LT2020-AP3 Particle filtering half mask
<b>NIVEL O NIVELES DE RENDIMIENTO O LA CLASE DE PROTECCIÓN DEL EPI / PERFORMANCE LEVEL OR PROTECTION CLASS OF THE PPE</b>	FFP3 NR
<b>FECHA DE EMISIÓN / ISSUE DATE</b>	<b>22/09/2020</b>
<b>VALIDEZ HASTA / VALIDITY UNTIL:</b>	<b>22/09/2021</b>
El presente certificado se mantendrá vigente durante 1 año siempre que no se modifiquen las condiciones establecidas en el Certificado de Examen UE de Tipo referenciado en el Anexo. <i>This certificate will remain in force for 1 year as long as the conditions established in the EU Type certificate referenced in the annex are not modified.</i>	



Xavier Ruiz Peña  
 Managing Director, Product Conformity B.U.



Este documento carece de validez sin su anexo técnico, cuyo número coincide con el del certificado.  
*This document is not valid without its technical annex, whose number coincides with the number of certificate.*

Puede comprobarse la validez de este certificado en nuestra página web / You can check the validity of this certificate into our website at:  
[www.appluslaboratories.com/certified\\_products](http://www.appluslaboratories.com/certified_products)

**ANEXO TÉCNICO**  
*TECHNICAL ANNEX*

**0370-4465-PPE/C2**

**I. MODELOS INCLUIDOS EN EL CERTIFICADO**

*REFERENCES INCLUDED IN THIS CERTIFICATE*

<b>Nº CERTIFICADO DE EXAMEN UE DE TIPO</b> <i>NR. EU TYPE EXAMINATION CERTIFICATE</i>	<b>0370-4243-PPE/B</b>
<b>EMITIDO POR</b> <i>ISSUED BY</i>	LGA1 TECHNOLOGICAL CENTER S.A. (APPLUS) <b>(Organismo notificado nº 0370 / Notified Body nr. 0370).</b>
<b>FECHA EMISIÓN</b> <i>ISSUE DATE</i>	24/08/2020
<b>VALIDEZ HASTA</b> <i>VALIDITY UNTIL</i>	24/08/2025
<b>MARCA</b> <i>BRAND</i>	LVTU
<b>IDENTIFICACIÓN DEL EPI (NÚMERO DE TIPO)</b> <i>IDENTIFICATION OF THE PPE (TYPE NUMBER)</i>	Ref.: LT2020-AP3 Particle filtering half mask
<b>NIVEL O NIVELES DE RENDIMIENTO O LA CLASE DE PROTECCIÓN DEL EPI / PERFORMANCE LEVEL OR PROTECTION CLASS OF THE PPE</b>	FFP3 NR
<b>INFORME DE ENSAYO DE CONFORMIDAD CON EL TIPO</b> <i>CONFORMITY TO TYPE TEST REPORT</i>	[2020] WSZ FHL NO.7807 issued by Jiangsu Guojian Testing Technology Co., Ltd.

# DECLARACIÓN DE CONFORMIDAD CE

## EU DECLARATION OF CONFORMITY

1. **Personal protective equipment:** Particle filtering half mask FFP3 NR (Model: LT2020-AP3) .

2. **Name and address of the manufacturer:**

**Name:** Ningbo Lvtu Safety Technology Co.,Ltd.

**Address :** No.6,Zhong xing Road,Yuyao Economic Development Zone,Zhejiang Province 315403,CHINA

3. **This declaration of conformity is issued under the sole responsibility of the manufacturer:** Ningbo Lvtu Safety Technology Co.,Ltd

4. **Object of the declaration is:** Particle filtering half mask FFP3 NR(Model: LT2020-AP3) for respiratory protection against particular.

5. **The object of the declaration described in point 4 is in conformity with the relevant Union Harmonization legislation:** REGULATION (EU) 2016/425 on personal protective equipment and repealing Council Directive 89/686/EEC.

6. Particle filtering half mask FFP3 NR (Model: LT2020-AP3) . **meets the FFP3 NR requirements of the harmonized standard EN 149:2001+2009 used in order to confirm the conformity with the relevant Union harmonization legislation:** REGULATION (EU)2016/425 on personal protective equipment and repealing Council Directive 89/686/EE.

7. **The notified body:** NB 0370- LGAI TECHNOLOGICAL CENTER (APPLUS)., with address: Campus UAB, Ronda de la Font del Carme s/n, E-08193 Bellaterra (Barcelona), Spain

8. **Certification Module:** EU TYPE EXAMINATION (Module B) + INTERNAL PRODUCTION CONTROL PLUS SUPERVISED CONTROL OF PRODUCTS AT ALEATORY INTERVALS (Module C2)

Signed for and on behalf of: Ningbo Lvtu Safety Technology Co.,Ltd. & Address: No.6,Zhong xing Road,Yuyao Economic Development Zone,Zhejiang Province 315403,CHINA

**Place and date of issue:**

Ningbo City, China

(Signature & Stamp)

Ningbo Lvtu Safety Technology Co.,Ltd

No.6,Zhong xing Road,Yuyao Economic Development Zone,Zhejiang Province 315403,CHINA





TEST REPORT



# Test Report

Report No.: [2020] WSZ FHL NO.7307

Product Name Particle filtering half mask

Applicant Ningbo Lvtu Safety Technology Co.,Ltd


Manufacturer Ningbo Lvtu Safety Technology Co.,Ltd

Test Type Entrusted inspection

**Jiangsu Guojian Testing Technology Co., Ltd.**  
3/F., Unit D, Xingye Building, Taihu International Tech-Park, Wuxi, Jiangsu, China



## Test Report

Product name	Particle filtering half mask	Model name	LT2020-AP3
		Brand	LVTU
Laboratory/ Add.	Jiangsu Guojian Testing Technology Co., Ltd./ 3/F., Unit D, Xingye Building, Taihu International Tech-Park, Wuxi, Jiangsu, China		
Applicant/ Add/Tel	Ningbo Lvtu Safety Technology Co.,Ltd/No.6, Zhongxing Road, Yuyao Economic Development Zone, Zhejiang Province 315403, CHINA.		
Manufacturer/ Add/Tel	Ningbo Lvtu Safety Technology Co.,Ltd./3/F,building 9,300 Yinhai Road,Jiangbei District,Ningbo City,Zhejiang Province 315403,CHINA/		
Sample classification	FFP3	Sample number	GW7307-2020
Sample quantity	110 pcs	Date of receipt of sample	23/07/2020
Test type	Entrusted inspection	Article/Batch/Style number	—
Date (s) of performance of tests	12/08/2020~18/08/2020	Testing location	Same as the Laboratory
Sample state	Meeting the requirements of testing	Sample description	Refer to page 3
Test standard(s)	EN 149:2001+A1:2009 Respiratory protective devices - Filtering half masks to protect against particles - Requirements, testing, marking		
Test items	Packaging, material, practical performance, finish of parts, compatibility with skin, flammability, carbon dioxide content of the inhalation air, head harness, field of vision, penetration of filter material, breathing resistance, total inward leakage		
Test conclusion	The samples upon testing comply with FFP3 classification requirements according to the standard EN 149:2001+A1:2009. The details of test results see on pages 3-11. 		
Note	The test results presented in this report relate only to the submitted sample as received.		

Su Hequn   
Approver (name, signature)

Wan Heng   
Reviewer (name, signature)

Yang Ying   
Chief Tester (name, signature)

<b>Sample description:</b>	White
<b>Test item particulars:</b>	
Type of use .....	<input type="checkbox"/> re-usable particle filtering half mask <input checked="" type="checkbox"/> single shift only particle filtering half mask
Classes of devices.....	<input type="checkbox"/> FFP1 <input type="checkbox"/> FFP2 <input checked="" type="checkbox"/> FFP3
Exhalation valve(s).....	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Inhalation valve(s).....	<input type="checkbox"/> Yes <input checked="" type="checkbox"/> No
Designed to protect against both solid & liquid aerosols.:	<input checked="" type="checkbox"/> Yes <input type="checkbox"/> No
<b>Possible test case verdicts:</b>	
- Test case does not be required to the test object.....:	NRq (Not required)
- Test case does not apply to the test object.....:	N/A (Not Applicable)
- Test object does meet the requirement.....:	P (Pass)
- Test object does not meet the requirement.....:	F (Fail)
<b>General remarks:</b>	
The test results presented in this report relate only to the submitted sample as received.	
This report shall not be reproduced, except in full, without the written approval of the issuing Laboratory can provide assurance that parts of a report are not taken out of context.	
Determination of the test results includes consideration of measurement uncertainty from the test equipment and methods.	
Throughout this report a <input type="checkbox"/> comma / <input checked="" type="checkbox"/> point is used as the decimal separator.	
<b>Environmental condition of the testing in this report:</b>	
1) Unless otherwise specified, the ambient temperature for testing shall be 25 °C;	
2) T.C. Temperature conditioned:	
a) for 24 h to a dry atmosphere of 70 °C;                      b) for 24 h to a temperature of -30 °C;	
and return to room temperature 25 °C for 4 h between exposures and prior to subsequent testing.	

S.No (Cl.No)	Test item		Unit	Technical requirements	Test result	Single item decision
1 (7.3)	Visual inspection	Marking/ information	—	Marking and the information supplied by the manufacturer, requirements refer to Cl.9 and Cl.10	The clause were not required	NRq
2 (7.4)	Packaging	Visual inspection	—	Particle filtering half masks shall be offered for sale packaged in such a way that they are protected against mechanical damage and contamination before use.	Particle filtering half masks packaged and protected against mechanical damage and contamination.	Pass
3 (7.5)	Material	Visual inspection	—	Materials used shall be suitable to withstand handling and wear over the period for which the particle filtering half mask is designed to be used.	Materials were suitable withstand handling and wear.	Pass
			—	After undergoing S.W., none of the particle filtering half masks shall have suffered mechanical failure of the facepiece or straps.	Sample 1: neither facepiece nor straps have mechanical failure Sample 2: neither facepiece nor straps have mechanical failure Sample 3: neither facepiece nor straps have mechanical failure	
			—	After undergoing S.W. and T.C., none of the particle filtering half masks shall not collapse.	Sample 4: no collapse Sample 5: no collapse Sample 6: no collapse	
			—	Any material from the filter media released by the air flow through the filter shall not constitute a hazard or nuisance for the wearer.	Not constitute a hazard or nuisance for the wearer	
			—	Particle filtering half mask designed to be re-usable, the materials used shall withstand the cleaning and disinfecting agents and procedures to be specified by the manufacturer. Testing shall be done in accordance with 8.4 and 8.5.	<input type="checkbox"/> Fulfil the requirements after testing, or <input checked="" type="checkbox"/> The Particle filtering half mask is NOT re-usable according to information supplied by manufacturer	
4 (7.6)	Cleaning and disinfecting	—	With reference to 7.9.2, after cleaning and disinfecting the re-usable particle filtering half mask shall satisfy the penetration requirement of the relevant class. Testing shall be done in accordance with 8.11.	<input type="checkbox"/> Tests results refer to S. No. 7(7.9.2), or <input checked="" type="checkbox"/> The Particle filtering half mask is NOT re-usable according to information supplied by manufacturer	N/A	



S.No (CLNo)	Test item	Unit	Technical requirements	Test result	Single item decision	
5 (7.7)	Practical performance	Head harness comfort	—	Head harness should be comfort.	Sample 1: has the feeling of comfortable wearing	Pass
					Sample 2: has the feeling of comfortable wearing	
		Security of fastenings	—	Fastenings are safe and reliable	Sample 1: All fastenings are firm	
					Sample 2: All fastenings are firm	
		Field of vision	—	Field of vision is acceptable	Sample 1: Having a wider visual field	
					Sample 2: Having a wider visual field	
6 (7.8)	Finish of parts	Visual inspection	—	Parts of the device likely to come into contact with the wearer shall have no sharp edges or burrs.	Parts of the device have no sharp edges and burrs	Pass
7 (7.9.2)	Leakage— Penetration of filter material	Sodium chloride	—	$\leq 1\%$	A.R. <sup>1)</sup> 0.1% 0.1% 0.1%	Pass
					S.W. <sup>1)</sup> 0.1% 0.1% 0.1%	
					M.S+ T.C. <sup>2)</sup> 0.2% 0.2% 0.2%	
		Paraffin oil	—	$\leq 1\%$	A.R. <sup>1)</sup> 0.1% 0.1% 0.1%	Pass
					S.W. <sup>1)</sup> 0.1% 0.1% 0.1%	
					M.S+ T.C. <sup>2)</sup> 0.3% 0.3% 0.4%	
<sup>1)</sup> average penetration over a time of 30s, beginning 3 min after the start of the test reported <sup>2)</sup> max. penetration during exposure test reported; Note: The penetration of the filter of the particle filtering half mask shall meet the requirements below: Maximum penetration of sodium chloride aerosol test 95 L/min max. FFP1: 20%, FFP2: 6%, FFP3: 1% Maximum penetration of paraffin oil aerosol test 95 L/min max. FFP1: 20%, FFP2: 6%, FFP3: 1%						

S.No (C.No)	Test item	Unit	Technical requirements	Test result		Single item decision
8 (7.10)	Compatibility with skin	—	Materials that may come into contact with the wearer's skin shall not be known to be likely to cause irritation or any other adverse effect to health.	A.R.	5 pcs all don't cause irritation	Pass
				T.C.	5 pcs all don't cause irritation	
9 (7.11)	Flammability	—	When tested, the particle filtering half mask shall not burn or not to continue to burn for more than 5s after removal from the flame.	A.R.	The Sample is burning. Burning time:0.4s	Pass
					The Sample is burning. Burning time:0.4s	
				T.C.	The Sample is burning. Burning time:0.5s	
					The Sample is burning. Burning time:0.4s	
10 (7.12)	Carbon dioxide content of the inhalation air	—	The carbon dioxide content of the inhalation air (dead space) shall not exceed an average of 1.0 % (by volume). Remark: 3 half masks (S1, S2 and S3) A.R. tested.	Sample 1	0.7225%	Pass
				Sample 2	0.7236%	
				Sample 3	0.7210%	
				average	0.72%	
11 (7.13)	Head harness	—	The head harness shall be designed so that the particle filtering half mask can be donned and removed easily. The head harness shall be adjustable or self-adjusting and shall be sufficiently robust to hold the particle filtering half mask firmly in position and be capable of maintaining total inward leakage requirements for the device.	A.R.	All of 5 pieces particle filtering half mask meet the requirements	Pass
				T.C.	All of 5 pieces particle filtering half mask meet the requirements	
12 (7.14)	Field of vision	—	The field of vision is acceptable if determined so in practical performance tests.	The two samples both have a wider visual field		Pass

S.No (Cl.No)	Test item	Unit	Technical requirements	Test result	Single item decision
13 (7.15)	Exhalation valve(s)	—	A particle filtering half mask may have one or more exhalation valve(s), which shall function correctly in all orientations.	No exhalation valve(s)	N/A
		—	If an exhalation valve is provided it shall be protected against or be resistant to dirt and mechanical damage, and may be shrouded or may include any other device that may be necessary for the particle filtering half mask to comply with 7.9.	No exhalation valve(s)	
		—	Exhalation valve(s), if fitted, shall continue to operate correctly after a continuous exhalation flow of 300 l/min over a period of 30 s.	No exhalation valve(s)	
		—	When the exhalation valve housing is attached to the faceblank, it shall withstand axially a tensile force of 10 N applied for 10 s.	No exhalation valve(s)	
14 (7.17)	Clogging— Breathing resistance & Penetration of filter material	—	Optional for single shift use devices, mandatory for re-usable devices, Tested by Cl. 7.17.1/2/3.	<input type="checkbox"/> Tests results refer to Table C&D, or <input checked="" type="checkbox"/> Tests not requested for single shift use face mask	N/A
15 (7.18)	Demountable parts	—	All demountable parts (if fitted) shall be readily connected and secured, where possible by hand.	No demountable parts	N/A

**Table A- Leakage—Total Inward Leakage**

S.No. (CLNo)	Test item	Unit	Technical requirements <sup>1)</sup>	Test result						Single item decision	
				Exercises	E1 (%)	E2 (%)	E3 (%)	E4 (%)	E5 (%)		TIL (%)
16 (7.9.1)	Leakage— Total inward leakage	—	At least 46 out of the 50 individual exercise results shall be not greater than <b>5%</b> ; And in addition, at least 8 out of the 10 individual wearer arithmetic means for the total inward leakage shall be not greater than <b>2%</b> .	A.R.	0.6	1.3	1.2	1.1	0.9	1.0	Pass
					0.9	1.3	1.2	1.6	1.0	1.2	
					1.2	1.8	1.6	1.7	1.3	1.5	
					0.4	0.8	1.0	0.9	0.4	0.7	
					0.9	1.9	1.6	1.8	1.5	1.5	
				T.C.	0.5	1.5	1.3	1.2	1.1	1.1	
					1.2	2.0	1.8	1.7	1.3	1.6	
					0.7	1.5	1.7	1.6	1.2	1.3	
					0.7	1.9	2.0	1.8	1.2	1.5	
					0.8	1.7	1.8	1.9	0.9	1.4	

Note 1:  
at least 46 out of the 50 individual exercise results (i.e. 10 subjects x 5 exercises) for total inward leakage shall be not greater than 25 % for FFP1 11 % for FFP2 5 % for FFP3  
in addition, at least 8 out of the 10 individual wearer arithmetic means for the total inward leakage shall be not greater than 22 % for FFP1 8 % for FFP2 2 % for FFP3.

**Table A-1- Test subjects—Facial dimension**

Test Subject No.	Length of face (mm)	Width of face (mm)	Depth of face (mm)	Width of mouth (mm)
1	120	130	109	59
2	122	140	115	65
3	119	160	139	55
4	112	122	119	63
5	110	130	118	60
6	115	119	110	59
7	112	123	113	55
8	103	130	100	50
9	118	139	130	63
10	120	135	125	50



Table B- Breathing Resistance

S.No (Cl.No)	Test item		Unit	Technical requirements <sup>1)</sup>	Test result					Single item decision	
					Exercises	Facing directly ahead	Facing vertically upwards	Facing vertically downwards	Lying on the left side		Lying on the right side
17 (7.16)	Breathing resistance	Inhalation 30 L/min	mbar	$\leq 1.0$	A.R.	0.5	0.5	0.4	0.5	0.5	Pass
						0.5	0.4	0.5	0.5	0.4	
						0.4	0.5	0.5	0.4	0.5	
					S.W.	0.5	0.4	0.5	0.5	0.4	
						0.4	0.5	0.5	0.4	0.5	
						0.5	0.5	0.4	0.5	0.5	
		T.C.		0.5	0.4	0.5	0.5	0.4			
				0.4	0.5	0.5	0.4	0.5			
				0.5	0.5	0.4	0.5	0.5			
		Inhalation 95 L/min		A.R.	1.5	1.5	1.4	1.5	1.5	Pass	
					1.5	1.4	1.5	1.5	1.4		
					1.4	1.5	1.5	1.4	1.5		
	S.W.		1.5	1.4	1.5	1.5	1.4				
			1.4	1.5	1.5	1.4	1.5				
			1.5	1.5	1.4	1.5	1.5				
	T.C.		1.4	1.5	1.5	1.4	1.5				
			1.5	1.5	1.4	1.5	1.5				
			1.5	1.4	1.5	1.5	1.4				
	Exhalation 160 L/min	A.R.	2.1	2.1	2.0	2.1	2.1	Pass			
			2.1	2.0	2.1	2.1	2.0				
			2.0	2.1	2.1	2.0	2.1				
		S.W.	2.1	2.0	2.1	2.1	2.0				
			2.0	2.1	2.1	2.1	2.1				
			2.1	2.1	2.0	2.0	2.1				
T.C.		2.0	2.1	2.1	2.0	2.1					
		2.1	2.1	2.0	2.1	2.1					
		2.1	2.0	2.1	2.1	2.0					

Note 1: Limitation may need be changed according to classification, refer to Table 2 — Breathing resistance of EN 149:2001 +A1:2009 for the Technical requirements.

**Table C- Clogging Test—Breathing resistance**

S.No (CI.No)	Test item <sup>(1,2)</sup>		Unit	Technical requirements <sup>(1,2)</sup> (mbar)	Test result					Single item decision	
					Exercises	Facing directly ahead	Facing vertically upwards	Facing vertically downwards	Lying on the left side		Lying on the right side
18 (7.17)	Clogging test— Breathing resistance	Inhalation 95 L/min	mbar	—	A.R.						N/A
					T.C.						
	Exhalation 95 L/min	mbar	—	A.R.						N/A	
				T.C.							

Note 1: Valved particle filtering half masks  
After clogging the inhalation resistances shall not exceed FFP1: 4 mbar FFP2: 5 mbar FFP3: 7 mbar at 95 L/min continuous flow;  
The exhalation resistance shall not exceed 3 mbar at 160 L/min continuous flow.

Note 2: Valveless particle filtering half masks  
After clogging the inhalation and exhalation resistances shall not exceed FFP1: 3 mbar, FFP2: 4 mbar FFP3: 5 mbar at 95 L/min continuous flow.

**Table D- Clogging Test—Penetration of filter material**

S.No (CI.No)	Test item	Unit	Technical requirements	Test result		Single item decision	
19 (7.17)	Clogging test- Penetration of filter material	Paraffin oil	—	—	A.R.		N/A
					T.C.		
					T.C.		

Note: Maximum penetration of test aerosol test 95 L/min max. FFP1: 20%, FFP2: 6%, FFP3: 1%


**Abbreviations :**

A.R. As received	M.S. Mechanical strength	S.W. Simulated wearing treatment
T.C. Temperature conditioned	F.C. Flow conditioned	C.D. Cleaning and Disinfecting

**Annex A- Estimates of the uncertainty of measurement**

Test item	Uncertainty
Total inward leakage	2.98%
Penetration of filter material	1.00%
Flammability	1.00%
Carbon dioxide content of the inhalation air	0.93%
Breathing resistance	1.90%

**Annex B- Sample Photo**

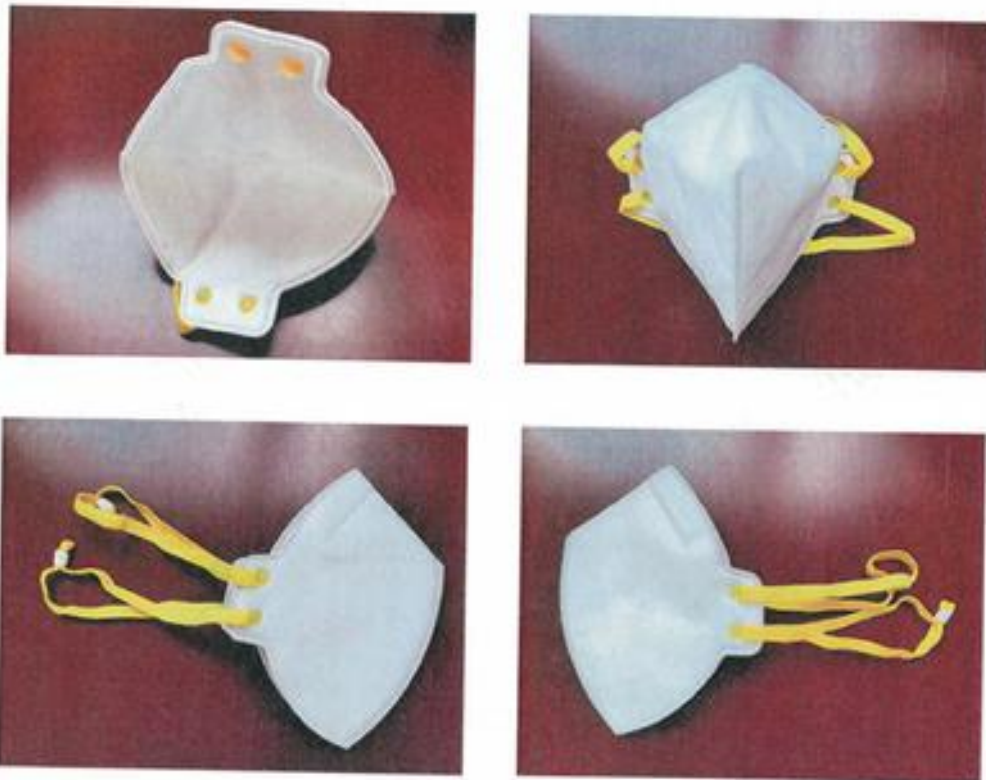

————— The end —————